



Part Circle: SR200  
Full Circle: F200  
Trajectories: 21°, 24°, 27°  
Connection options include:

- 3.5" FNPT or FBSP
- 4" FNPT
- Nelson Flange
- Metric Flange
- UFI Flange
- ANSI Flange

### 200 TAPER BORE NOZZLE **200T** — 27° TRAJECTORY


200T – Specify size when ordering



	26,7mm 9323-105			27,9mm 9323-110			30,5mm 9323-120			33,0mm 9323-130			35,6mm 9323-140			38,1mm 9323-150			40,6mm 9323-160			44,5mm 9323-175			48,3mm 9323-190		
kg/cm <sup>2</sup>	L/S	M <sup>3</sup> /H	M	L/S	M <sup>3</sup> /H	M	L/S	M <sup>3</sup> /H	M	L/S	M <sup>3</sup> /H	M	L/S	M <sup>3</sup> /H	M	L/S	M <sup>3</sup> /H	M	L/S	M <sup>3</sup> /H	M	L/S	M <sup>3</sup> /H	M	L/S	M <sup>3</sup> /H	M
4,0	15,5	55,7	104	17,8	63,9	106	20,3	73,1	112	23,8	85,8	117	27,5	98,9	129	32,2	116	129	36,1	130	134	42,9	154	141	50,7	183	149
5,0	17,3	62,3	111	19,9	71,5	117	22,7	81,7	121	26,7	96,0	126	30,7	111	132	36,0	130	138	40,3	145	143	48,0	173	152	56,7	204	158
6,0	19,0	68,2	115	21,8	78,3	121	24,9	89,5	126	29,2	106	132	33,7	121	138	39,4	142	144	44,2	159	149	52,6	189	158	62,1	224	164
7,0	20,5	73,7	122	23,5	84,6	128	26,9	96,7	134	31,5	114	140	36,3	131	146	42,6	153	152	47,7	172	159	56,8	204	168	67,1	241	175
8,0	21,9	78,8	126	25,1	90,4	132	28,7	103	138	33,7	121	144	38,9	140	152	45,5	164	159	51,0	184	165	60,7	218	174	71,7	258	182
9,0	23,2	83,6	130	26,6	95,9	136	30,4	110	142	35,8	129	148	41,2	148	157	48,3	174	164	54,1	195	170	64,4	232	180	76,0	274	188

### 200 RING NOZZLE **200R**

200R = Body + Cap + set of 7 rings  
Complete set of 7 rings only = #6845  
R200 = Individual ring only,  
specify size when ordering.

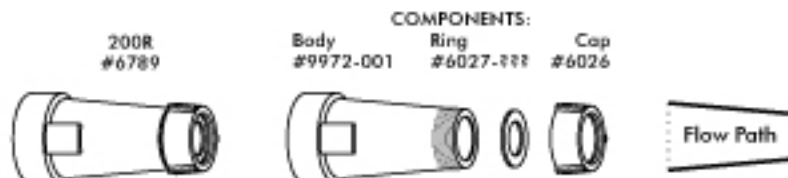

	32,8mm 6027-129			37,1mm 6027-146			39,6mm 6027-156			42,2mm 6027-166			44,2mm 6027-174			46,5mm 6027-183			49mm 6027-193									
kg/cm <sup>2</sup>	L/S	M <sup>3</sup> /H	M	L/S	M <sup>3</sup> /H	M	L/S	M <sup>3</sup> /H	M	L/S	M <sup>3</sup> /H	M	L/S	M <sup>3</sup> /H	M	L/S	M <sup>3</sup> /H	M	L/S	M <sup>3</sup> /H	M	L/S	M <sup>3</sup> /H	M	L/S	M <sup>3</sup> /H	M	
3,5	14,5	52,3	99	18,9	68,1	108	22,2	80,0	113	25,8	92,7	119	30,1	108	123	33,7	121	128	40,3	145	137	43,1	155	137				
4,0	15,5	55,9	103	20,2	72,8	116	23,8	85,5	117	27,5	99,1	123	32,2	116	128	36,1	130	132	42,9	154	140	48,2	174	146				
5,0	17,4	62,5	109	22,6	81,4	118	26,6	95,6	124	30,8	110,8	131	36,0	130	135	40,3	145	140	48,0	173	146	52,8	190	152				
6,0	19,0	68,5	115	24,8	89,1	125	29,1	106	131	33,7	121	137	39,4	142	141	44,2	159	146	52,6	189	146	60,7	218	158				
7,0	20,5	74,0	119	26,7	96,3	130	31,4	113	136	36,4	131	142	42,6	153	146	47,7	172	152	56,8	204	159	67,1	241	159				
8,0	22,0	79,1	123	28,6	103	134	33,6	121	140	38,9	140	146	45,5	164	150	51,0	184	157	60,7	218	164	71,7	258	164				
9,0	23,2	83,9	127	30,3	109	137	35,6	128	143	41,2	149	149	48,3	174	154	54,1	195	160	64,4	232	168	76,0	274	168				

Diameters are based on 27° trajectory. Big Gun® performance data has been obtained under ideal test conditions and may be adversely affected by wind, poor hydraulic entrance conditions or other factors. Nelson Irrigation Corporation makes no representation regarding droplet condition, uniformity, or application rates.